




Pilkington Profilit™ -Delivery Programme



Glass thickness 6 mm, flange height 41 mm



Glass thickness 7 mm, flange height 60 mm

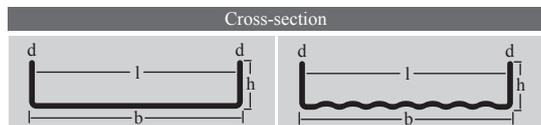

Tolerances: $b \pm 2.0$ mm

$d \pm 0.2$ mm

$h \pm 1.0$ mm

Cutting tolerances of ± 3.0 mm are allowed.

Tolerances according to EN 572-7. Dimensions are nominal.

For the application of Pilkington Profilit™ the relevant national and international requirements and standards have to be considered in the various countries.

Pilkington Profilit™ types		K22	K25	K32	K50	K25 Wave	K22/60/7	K25/60/7	K32/60/7	K25/60/7 Wave
Dimensions	Width b (mm)	232	262	331	498	262	232	262	331	262
	Flange height h (mm)	41	41	41	41	41	60	60	60	60
	Glass thickness d (mm)	6	6	6	6	6	7	7	7	7
	Weight (single glazing) kg/m ²	19.5	19	18.2	17	19	25.5	24.5	22.5	24.5
	max. supply length Lmax (mm) (not max. installation length)	6000	6000	6000	5000	6000	7000	7000	7000	7000
Pilkington Profilit™ with wires Ornament 504	Number of longitudinal wires	7	8	10	16	8	7	8	10	8
	16 longitudinal wires (mesh function) *	-	●	-	-	-	-	●	-	-
	8+2 wires *	-	-	-	-	-	-	○	-	-
Pilkington Profilit™ functional glass Ornament 504	Plus 1.7 (heat insulating glass, low-e)	●	●	●	●	●	●	●	●	●
	Plus 1.7 Wire (heat insulating glass, low-e)	○	●	●	○	●	●	●	●	●
	Antisol (sun-protection glass)	●	●	●	●	●	●	●	●	●
	Antisol Wire (sun-protection glass)	○	●	●	○	●	●	●	●	●
Pilkington Profilit™ Colours / Patterns / Design	Amethyst	●	●	●	●	●	●	●	●	●
	Amethyst Wire	○	●	●	○	●	●	●	●	●
	Clear (without ornament) *	-	●	-	○	-	○	●	-	-
	Clear Wire (without ornament) *	-	●	-	-	-	○	●	-	-
	Micro *	●	●	●	●	●	●	●	●	●
	Micro Wire *	○	●	●	○	●	●	●	●	●
	Macro *	○	●	-	-	-	○	●	-	-
	Slim Line *	○	●	-	-	-	○	●	-	-
	Opal □	●	●	●	●	●	●	●	●	●
OW (low iron) *	○	○	○	○	○	○	○	○	○	
Pilkington Profilit™ thermally toughened	Pilkington Profilit™ T □, * thermally toughened, with or without heat-soak test	●	●	●	●	●	●	●	●	●
	Pilkington Profilit™ T Color □, ♦ thermally toughened and coloured enamelled, with or without heat-soak test	●	●	●	●	●	●	●	●	●

● Production standard

* with coating available (Amethyst, Antisol, Plus 1.7)

♦ Lmax = 4.5 m

○ Production optional

□ without CE-marking

Sale from stock providing there are sufficient stocks available or from next production run. We would be pleased to examine the possibility of supplying any product combination not mentioned above upon request. Product specifications are available upon request.

Subject to change.

This publication provides only a general description of the product. Further, more detailed information may be obtained from your local Pilkington Building Products supplier. It is the responsibility of the user to ensure that the use of this product is appropriate for any particular application and that such use complies with all relevant legislation, standards, code of practice and other requirements.

To the fullest extent permitted by applicable laws, the companies of NSG Group disclaim all liability for any error in or omission from this publication and for all consequences of relying on it.

Pilkington is a trade mark of NSG Group.



CE marking confirms that a product complies its relevant harmonised European Norm.

The CE Marketing label for glass products, including declared values, can be found at www.pilkington.com/CE.



PILKINGTON
NSG Group Flat Glass Business

Bauglasindustrie GmbH

Hüttenstraße 33 66839 Schmelz

Phone +49 (0)6887 303 0 Fax +49 (0)6887 303 45

E-Mail profilbauglas@nsg.com

www.pilkington.com